

Digital Terrestrial HD Receiver **SRT 8541**

freenet TV

Einfach.Besser. Fernsehen über DVB-T2 HD.

Erleben Sie die neue TV-Vielfalt:

- mehr Programme
- schärfere Bilder
- einfache Bedienung

www.freenet.tv



Enjoy TV programmes in excellent HD quality

With the new high-end DVB-T2 HD receiver SRT 8541, it is easier than ever before to watch free and Irdeto encrypted German channels. This small receiver supports the new standard HEVC/H.265 and features amongst other things a USB port for playback of files. It also has a memory for up to 700 channels, 4 favourite lists for TV and radio programmes and much more. You'll never want to watch TV differently anymore.

Upgrade your receiver functionality by adding the recording and Timeshift function (available at our webshop).

- HDTV receiver for DVB-T² and DVB-T Free-To-Air TV and radio programmes via outdoor or indoor antenna¹
- Embedded Cardless Conditional Access System for Irdeto encrypted channels

Favourite

8

Parental

control

RSS feeds

- Supports HEVC/H.265 and Dolby® Digital Plus²
- New tuner technology for excellent reception
- Excellent audio and video quality

Teletext

EPG

Programme Guide

USB

Playback

- Display showing channel number in operating mode and time in standby
- 4 favourite lists for TV and radio programmes
- Electronic TV Programme Guide (EPG) for on screen programme information of present/following event information up to 14 days³
- Automatic and manual channel scan options








Digital Terrestrial HD Receiver SRT 8541

- Teletext, full multi-lingual DVB subtitling and audio track support³
- USB port: playback of files⁴, update receiver software via USB storage device
- Upgrade your receiver functionality by adding the recording and Timeshift function (available at our webshop).
- Quick and easy installation & user-friendly menu
- USB power control for power saving in standby mode
- 700 channels memory capacity
- Fast channel zapping: sorting by alphabet
- 10 event timers with 4 modes (once, daily, weekly, Monday to Friday)
- High definition on screen display (OSD)
- Booking of events directly from EPG
- Parental lock function for menu and rating control for channel

- Multi-lingual support on screen menu (OSD)
- Many channel handling options: lock, move, delete
- Power on with last viewed channel
- Digital sound through coaxial output (S/PDIF) by connecting to digital amplifier
- User-friendly remote control
- UHF tuner
- Support of active antenna by 5 V output
- Power saving automatic standby function
- Connections: ANT IN, Ethernet, TV SCART, HDMI, S/PDIF coaxial, Power switch, USB port
- Accessories: Remote control, 2x AAA batteries 1. Depending on local signal conditions
- Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.
- 3. Availability depending on the broadcast
- 4. STRONG cannot guarantee the playback of files although extensions are listed, as it depends on codec, data bit rate and resolution used (all MPEG codec formats are supported).

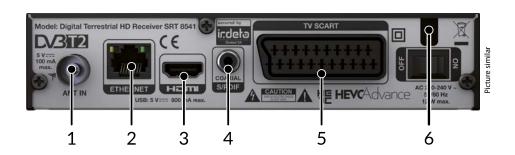

4. Digital Audio Amplifier

Connectors: ANT IN - IEC Female

3.TV (HDMI)

1. Antenna 2. Ethernet

Tuner:

Input connector: IEC60169-2, female, 75 Ohm nominal Input frequency range: UHF: 474 ~ 786 MHz Input signal level: DVB-T2: -70 dBm ~ -25 dBm Antenna power: 5 V DC, max. 100 mA, short cut protected

Demodulator:

Demodulator: QSPK, 16/64/256 QAM DVB-T2 (EN 302 755) Transmission mode: normal and extended Guard intervals: DVB-T2 = 1/128, 1/32, 1/16, 19/256, 1/8, 19/128, 1/4

Video Decoder: Video resolution: 576i, 576p, 720p, 1080i, 1080p Decoding & Video Out: PAL Aspect Ratio: 4:3 and 16:9 Aspect Conversion: Pan & Scan, Letterbox and Combined

Audio Decoder:

Audio support: Dolby Digital Plus*/AC3+/ PCM MPEG MusiCam Layer II Sampling rate: 32, 44.1, 48 kHz Audio mode: Stereo, Mono L/R

Conditional Access System

System: Irdeto CCA Card reader: 1 slot, conforming to ISO 7816

*Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.



Ethernet HDMI TV SCART (RGB, CVBS, Audio L&R) S/PDIF (coaxial output) USB 2.0 port: 5 V/800 mA (max.) supported

General Data:

5.TV (SCART)

6. Power cord

Power supply: AC 220 - 240 V ~ 50/60 Hz Power consumption: 7 W (typ.), 12 W (max) Power consumption in standby: max. 1.0. W Operating temperature: 0 °C ~ +40 °C Storage temperature: -10 °C ~ +50 °C Operating humidity range: 10 ~ 85%, RH, Non-condensing Size (WxDxH) in mm: 168 x 99 x 39 Net-weight: 0.35 kg

EAN SRT 8541: 8717185449624

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. Dolby Audio, Dolby Digital, Dolby Digital Flux, Dolby and the double: O symbol are registered trademarks of Dolby Laboratione, SATRA is a registered trade mark of SSATSAT, Metters is a registered trade mark of Irdeo Access BV, HDM, the HDM logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDM Licensing LLC in the United States and other countries, Skylink^{*} and CS Link^{*} are trademarks which MC Froup SAL use under license. All other product manes are trademarks or registered trademarks of their regetive owners. 0 STRMOK 2018, All rights reserved.

www.strong.tv