


Wall mounted unit

ATXQ-A + ARXQ-A

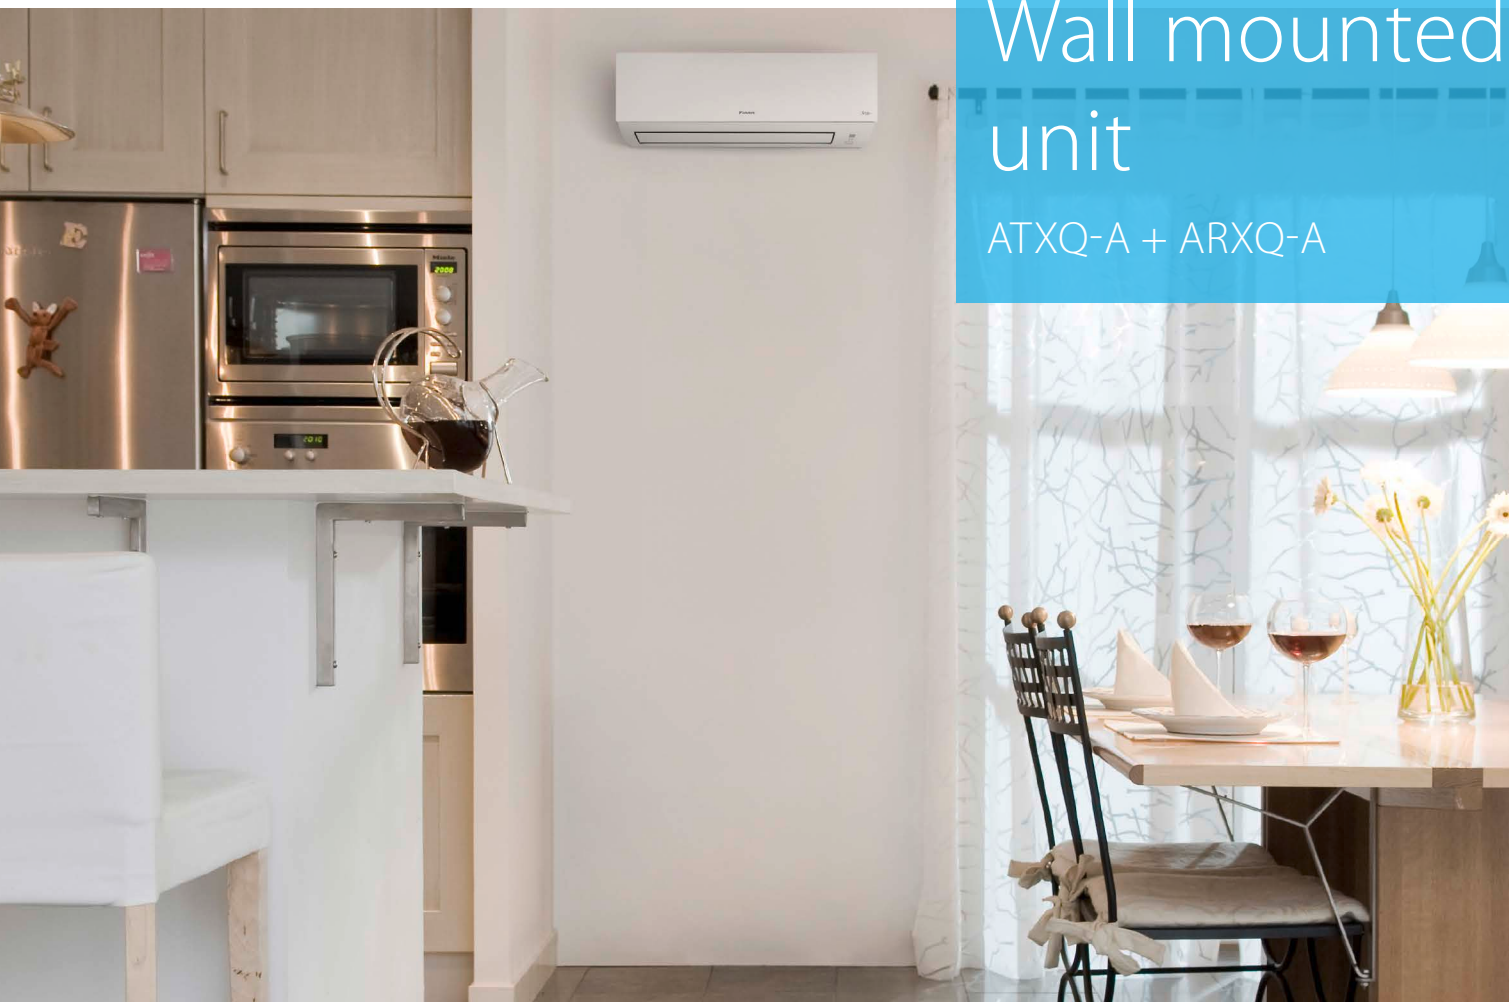

BLUEEVOLUTION

Siesta



Daikin Residential Controller



Energy saving during standby mode

Wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily with any interior décor and is easier to clean
- › Daikin residential controller via app (optional)

- › Seasonal efficiency values up to A++ in cooling
- › Bluevolution range: lower environmental impact

ATXQ-A + ARXQ-A



Indoor unit			ATXQ	25A	35A	
Dimensions	Unit	HeightxWidthxDepth		mm	291x770x232	
Weight	Unit			kg	9.00	
Air filter	Type	Removable/washable				
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	5.0/6.5/8.1/10.2	6.0/7.0/8.5/10.5
		Heating	Silent operation/ Low/Medium/High	m³/min	6.8/8.1/9.6/11.1	6.9/8.3/10.0/12.0
Sound power level	Cooling			dBA	55	
Sound pressure level	Cooling	Silent operation/Low/High		dBA	23.0/26.0/40.0	24.0/28.0/41.0
	Heating	Silent operation/Low/High		dBA	25.0/29.0/40.0	25.0/30.0/42.0
Control systems	Infrared remote control			ARC470A1		
	Wired remote control			-		


Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

Outdoor unit		ARXQ		25A	35A
Dimensions	Unit	HeightxWidthxDepth	mm	550x740x337	
Weight	Unit		kg	23.0	25.5
Sound power level	Cooling	Nom.	dBA	61.0	62.0
Sound pressure level	Cooling	High	dBA	47.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	10 ~46
	Heating	Ambient	Min.~Max.	°CWB	-15 ~18
Refrigerant	Type			R-32	
	GWP			675.0	
	Charge		kg/TCO ₂ Eq	0.500 /0.340	0.710 /0.480
Piping connections	Liquid	OD	mm	6.35	
	Gas	OD	mm	9.50	
	Piping length	OU - IU	Max.	20	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)	
	Level difference	IU - OU	Max.	12.0	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawings for electrical data

Efficiency data		ATXQ + ARXQ		25A + 25A	35A + 35A
Cooling capacity	Min./Nom./Max.		kW	1.30/2.50/3.00	1.30/3.50/3.80
Heating capacity	Min./Nom./Max.		kW	1.30/3.00/3.90	1.30/3.90/4.80
Power input	Cooling	Nom.	kW	0.77	1.08
	Heating	Nom.	kW	0.81	1.05
Space cooling	Energy efficiency class			A++	
	Capacity	Pdesign	kW	2.50	3.50
	SEER			6.16	6.15
	Annual energy consumption		kWh/a	142	199
Space heating (Average climate)	Energy efficiency class			A+	
	Capacity	Pdesign	kW	2.30	2.40
	SCOP/A			4.15	4.11
	Annual energy consumption		kWh/a	776	818
Nominal efficiency	EER			3.24	
	COP			3.71	
	Annual energy consumption		kWh	386	540
	Energy labeling Directive Cooling/Heating			A/A	

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



ECPEN21-067

09/2021



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.