

# KSG70HPE

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709333621
Hood width	72 cm



## Aesthetics

Aesthetic	Universale	Serigraphy colour	Black
Colour	Stainless steel	Logo	Silk screen
Finishing	Satin		





## Controls

Control setting	Buttons	Led color	White
-----------------	---------	-----------	-------

## Programme / Functions

No. of speeds	3
---------------	---

## Technical Features

   					
No. of lights	2	Anti-grease filters	Aluminium		
Light type	LED	Charcoal filters included	Yes		
Light Power	5 W	Filter replacement indicator	Yes		
Light color temperature scale (°K)	2700 °K	Vent outlet	150 mm		
Free outlet maximum capacity	580 m³/h	Minimum distance from GAS hob	650 mm		
Motor power	175 W	Minimum distance from ELECTRIC hob	500 mm		
No. of filters	2				

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	232	44
Speed 2	356	53
Speed 3	584	63


## Performance / Energy Label

B

Annual Efficiency Consumption (AEChood)	75 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dB(A)
Energy efficiency class (EEC)	B	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency (FDE)	20,9	Time increase factor (F)	1,2
Fluid Dynamic Efficiency class (FDEC)	C	Energy Efficiency Index	69,6
Lighting Efficiency (LE)	44,1 lux/W	Measured air flow rate at best efficiency point (Qbep)	345 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	355 Pa
Grease Filtering Efficiency (GFE)	75,1 %	Measured electric power input at best efficiency point (Wbep)	163 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	5 W
Air flow at minimum speed (Qmin)	225 m³/h	Average illumination of the light on the cooking surface (Emiddle)	221 lux
Air flow at maximum speed (Qmax)	580 m³/h	Sound power level at highest setting (Lwa)	65 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dB(A)		

## Electrical Connection

Electrical connection rating	285 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

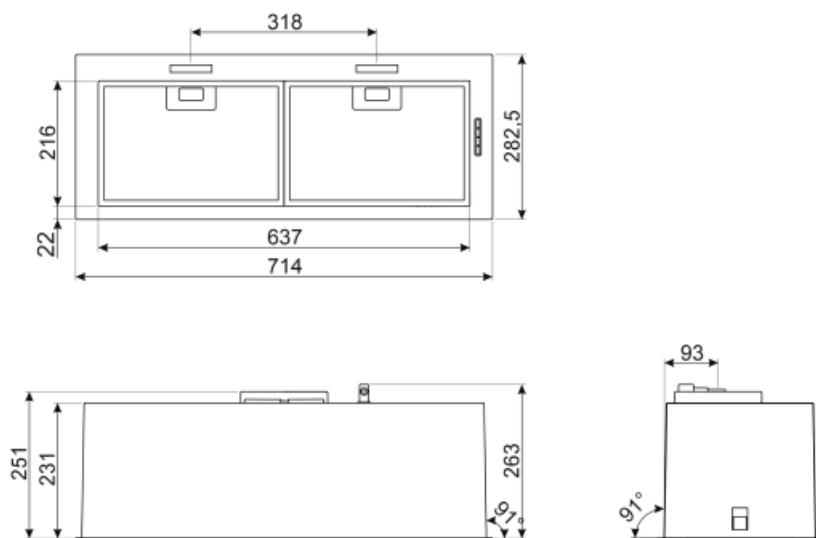

## Not included accessories

---

**KITFC221R**

Charcoal filter high efficiency capable to regenerate and last up to 3 years.



---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.