


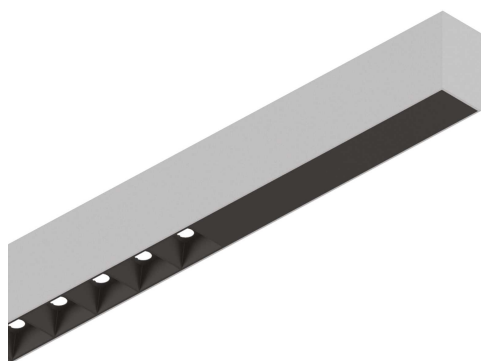

Info generali


Tecnico - Sistemi

Indoor suspended, recessed or ceiling mounted linear fitting with integrated LED sources and direct light emission

Ean	8021696192512
Articolo	FLUO ACCENT 1800 3000K AL
Installazione	Ceiling, Suspension, Recessed (Ceiling)
Garanzia	5 years
Peso lordo	6.63 kg
Volume	0.025675 m ³

Info tecniche e installative

Peso netto	3.86 kg
Classe di isolamento	I
Grado di protezione	IP20
Conformità	CE
Temperatura d'esercizio	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Alimentazione	220-240 V AC 50/60 Hz
Alimentatore	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Accessori non inclusi	Mounting kit (suspension, recessed, surface), Dimmable driver, Blinded corner, Structure connector

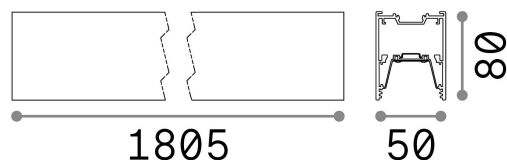

Info sorgente e prestazionali

Sorgente integrata	Integrated LED module
Sorgente sostituibile	Replaceable (by qualified operators only)
Potenza	30 W
Emissione	Direct
Consumo massimo	max 30 W
Caratteristiche LED	LED SMD OSRAM
CCT LED	3000 K
Durata LED (t. 25°c)	50000 h
CRI	> 80
SDCM	3
Fascio luminoso	30°
UGR massimo	< 13
Flusso sorgente	2750 lm
Flusso utile	2200 lm
Potenza in stand-by	< 0.50 W