


# EVERYONE LOVES BASS

To enhance a TYPHON system, the T-Sub-AX15B is the perfect active subwoofer partner. With 700w of Class D Continuous power driving a custom WP 15" Quad layer driver, T-Sub-AX15B is sonically matched for a TYPHON.

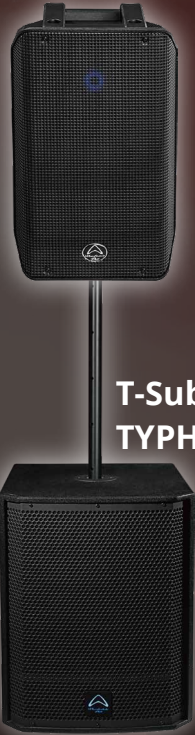

T-Sub with  
TYPHON

## Accessories

### Optional Typhon Tour bags

Typhon Tour bag is for touring musicians, mobile DJs and any professional sound engineer or artist looking to keep their Typhon in showroom quality.

Made with a durable, waterproof padded mesh nylon material and removable sections for ultimate convenience, this is another easy way of making sure that Typhon stands the test of time and a lifetime on the road.



### WPB-2

For tidy wall mounting, the WPB-2 can be used. This all-steel bracket features a 35mm pole fixture which the Typhon 8" or Typhon 12" will sit on securely.



Typhon 12" is supplied with a practical wedge accessory. This custom designed wedge allows Typhon to be placed at the perfect angle for use onstage - as a floor monitor. Typhon 15" and 8" can be used as a monitor without this accessory.



# SPECIFICATIONS

Model Name	Typhon-AX8	Typhon-AX8-BT
System Type	Active 8" 2-way	Active 8" 2-way
Frequency Response (+/-3 dB)	65 Hz-20 kHz	65 Hz-20 kHz
Frequency Range (- 10 dB)	60 Hz-20 kHz	60 Hz-20 kHz
Maximum SPL (peak @1 m)	127 dB	127 dB
Sensitivity (@ 1 W / 1 m)	96 dB	96 dB
<b>Low Frequency Transducer</b>		
Size (mm / inches)	203.8 mm / 8"	203.8 mm / 8"
Voice-Coil Size (mm / inches)	65 mm / 2.5"	65 mm / 2.5"
Rated Impedance	4 Ω	4 Ω
<b>High Frequency Transducer</b>		
HF Driver Type	Compression Driver	Compression Driver
Coil Size (mm / inches)	44 mm / 1.75"	44 mm / 1.75"
Exit Size (mm / inches)	25 mm / 1"	25 mm / 1"
Diaphragm Material	Titanium	Titanium
Rated Impedance	8 Ω	8 Ω
Nominal Coverage (H x V)	Hybrid Symmetry Horn 100° x 80°	Hybrid Symmetry Horn 100° x 80°
Amplifiers	2 x Class D	2 x Class D
Power Rating:	1440 W Peak (1200 W LF + 240 W HF), 720 W Continuous (600 W LF + 120 W HF)	1440 W Peak (1200 W LF + 240 W HF), 720 W Continuous (600 W LF + 120 W HF)
DSP Controls---D-EQ	FLAT/MONITOR/BASS/PUNCH	FLAT/MONITOR/BASS/PUNCH
<b>Amplifier Protection</b>		
Power On Protection	Yes	Yes
Thermal Protection	Yes	Yes
Low Line Voltage Shut Down	Yes	Yes
Driver Protection	Yes	Yes
DC Protection	Yes	Yes
Short Protection	Yes	Yes
Clip Limiter	Yes	Yes
Limiter Indicator	Yes	Yes
Power Indicator	Yes	Yes
<b>Inputs</b>		
Input A - type	Balanced /RCA	Balanced/RCA/Bluetooth(aptX,with link Stereo)
Input Sensitivity	775 mV (0 dBu)	775 mV (0 dBu)
Maximum Input Level	4 V	4 V
Input Connectors	2 x XLR, 2 x 6.3 mm, 2 x RCA (Line/MIC)	2 x XLR, 2 x 6.3 mm, 2 x RCA (Line/MIC)
Input Impedance	20 K ohms	20 K ohms
<b>Line Output</b>		
Line Output Connector	XLR	XLR
Loop Gain	0 dB	0 dB
<b>AC Power details</b>		
Power Supply	220~240 V AC / 100~120 V AC 50/60 Hz	220~240 V AC / 100~120 V AC 50/60 Hz
Rigging / Bracket / Mounting Options	9 x M8 threaded inserts	9 x M8 threaded inserts
	Pole-mount receptacle with lock screw	Pole-mount receptacle with lock screw
	Optional WPB-2 wall-mount bracket	Optional WPB-2 wall-mount bracket
Handles	4 carry handles (on top and bottom side)	4 carry handles (on top and bottom side)
<b>Enclosure</b>		
Enclosure Material and finish	Injection Moulded Polypropylene	Injection Moulded Polypropylene
Colour Options	Black paint	Black paint
Grille Material & Finish	steel	steel
<b>Dimensions - Unpacked</b>		
Height	433.6 mm / 17.1"	433.6 mm / 17.1"
Width Front	256 mm / 10.1"	256 mm / 10.1"
Width Rear	100.1 mm / 3.9"	100.1 mm / 3.9"
Depth	240 mm / 9.5"	240 mm / 9.5"
<b>Dimensions - Packed</b>		
Height	509 mm / 20.0"	509 mm / 20.0"
Width Front	326 mm / 12.8"	326 mm / 12.8"
Width Rear	326 mm / 12.8"	326 mm / 12.8"
Depth	310 mm / 12.2"	310 mm / 12.2"
Net Weight (kg / lbs)	10.7 kg / 23.5 lbs	10.7 kg / 23.5 lbs
Gross Weight (kg / lbs)	12.7 kg / 27.9 lbs	12.7 kg / 27.9 lbs