EZVIZ™

Works with **Apple Home** | ✕ **matter** | **EZVIZ** Connect™

A3-R200

Home Gateway

Grow your smart home with elevated connectivity

The A3-R200 is EZVIZ's first Matter-compatible and HomeKit-supported home hub. It interconnects home devices and allows seamless integration across platforms, making your smart home run smoothly with automated, intuitive controls. It's a small device that unlocks the large potential of smart living.

Easy Set-Up & Control via EZVIZ App

Supports Matter & Apple HomeKit[1]

Supports Wired and Wi-Fi Connection

Instant Mobile Alerts

85dB Audible Warning

Connects Up to 64 EZVIZ Devices[2]

A unified hub for various devices

The A3-R200 works with a wide variety of EZVIZ products, and the list keeps growing as EZVIZ expands its product family. It can connect with up to 64 devices[2], so even large smart homes with complicated systems can function in a harmonious and efficient manner.

T1C
PIR Motion Sensor

T2C
Open/Close Sensor

L2S / DL01S
Smart Lock

T3C
Smart Button

T10C
Water Leak Sensor

T4C
Smoke Sensor

T9C
Smart Siren

T51C
Temperature & Humidity Sensor

Customize systems with simple controls

With the A3-R200, you can seamlessly add, control, and even personalize your EZVIZ home sensor system. Enjoy unparalleled convenience by managing the connected devices right from your smartphone.
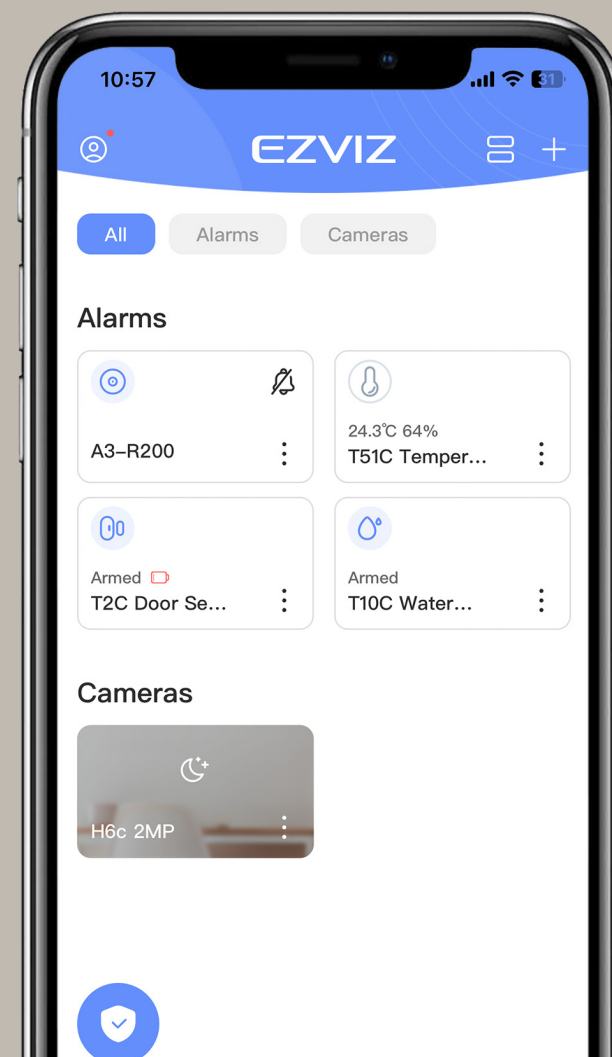
Arm/disarm with one tap
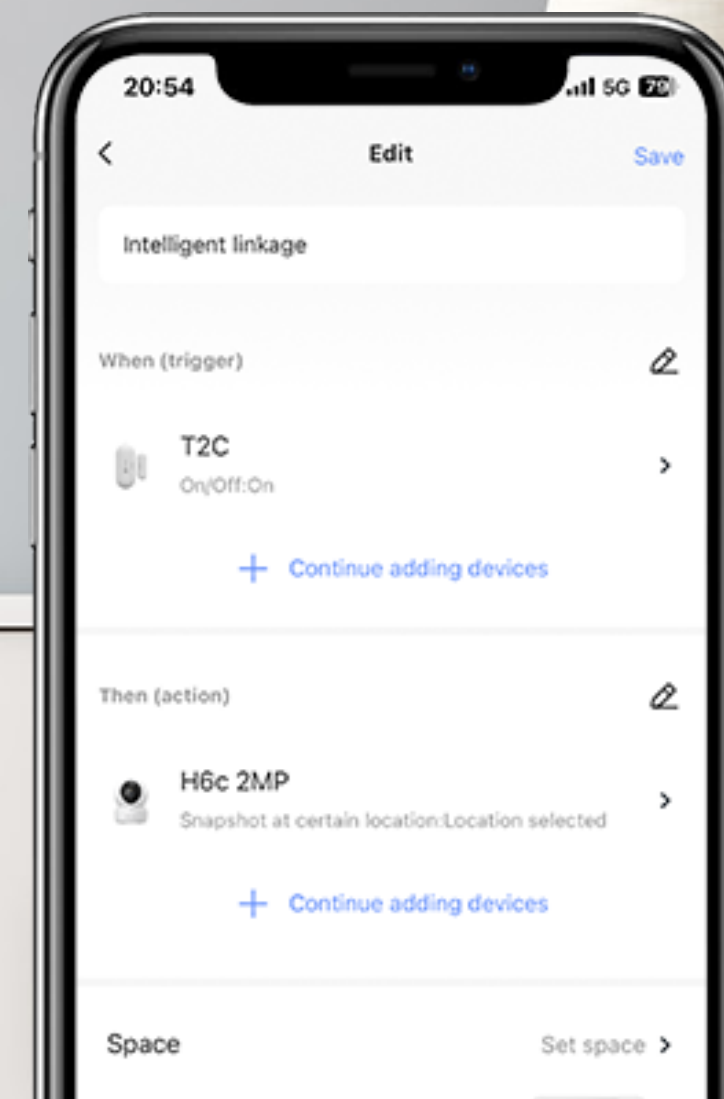
Instant alerts upon sensor detection

Check activity log anytime
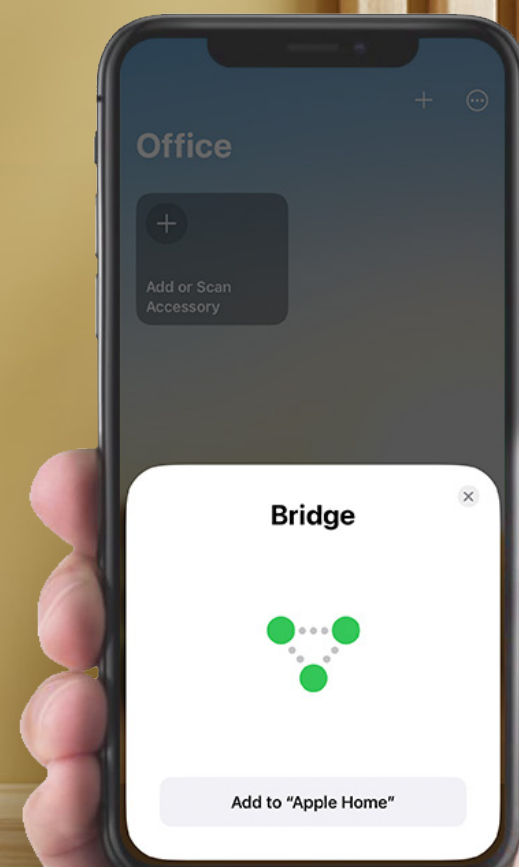
Interlinked security for enhanced protection

Your EZVIZ sensors and cameras can now work jointly to optimize home safety, thanks to the automation function offered by the A3-R200. When the sensor detects an activity, the linked EZVIZ camera[3] will automatically rotate to capture a snapshot, so you keep a record of what's going on.

20:54

Edit   Save

Intelligent linkage

When (trigger)

T2C
On/Off:On

Continue adding devices

Then (action)

H6c 2MP
Snapshot at certain location:Location selected

Continue adding devices

Space   Set space

Sensor

Apple Home

Office

Add or Scan Accessory

A3-R200

Bridge

Add to "Apple Home"

Works with
Apple Home

Ease your daily routines with Apple HomeKit

With the A3-R200, your EZVIZ sensors[1] now for the first time communicate and interoperate with smart-home appliances using Apple Home. You can check out their status and set up automated actions on your Apple devices.

Unlock wider smartness with Matter

The A3-R200 is ready to go far beyond to build your dream smart home. You will be able to connect EZVIZ smart devices[1] with other Matter-compatible products, so as to create unified, secure and stable smart experience.

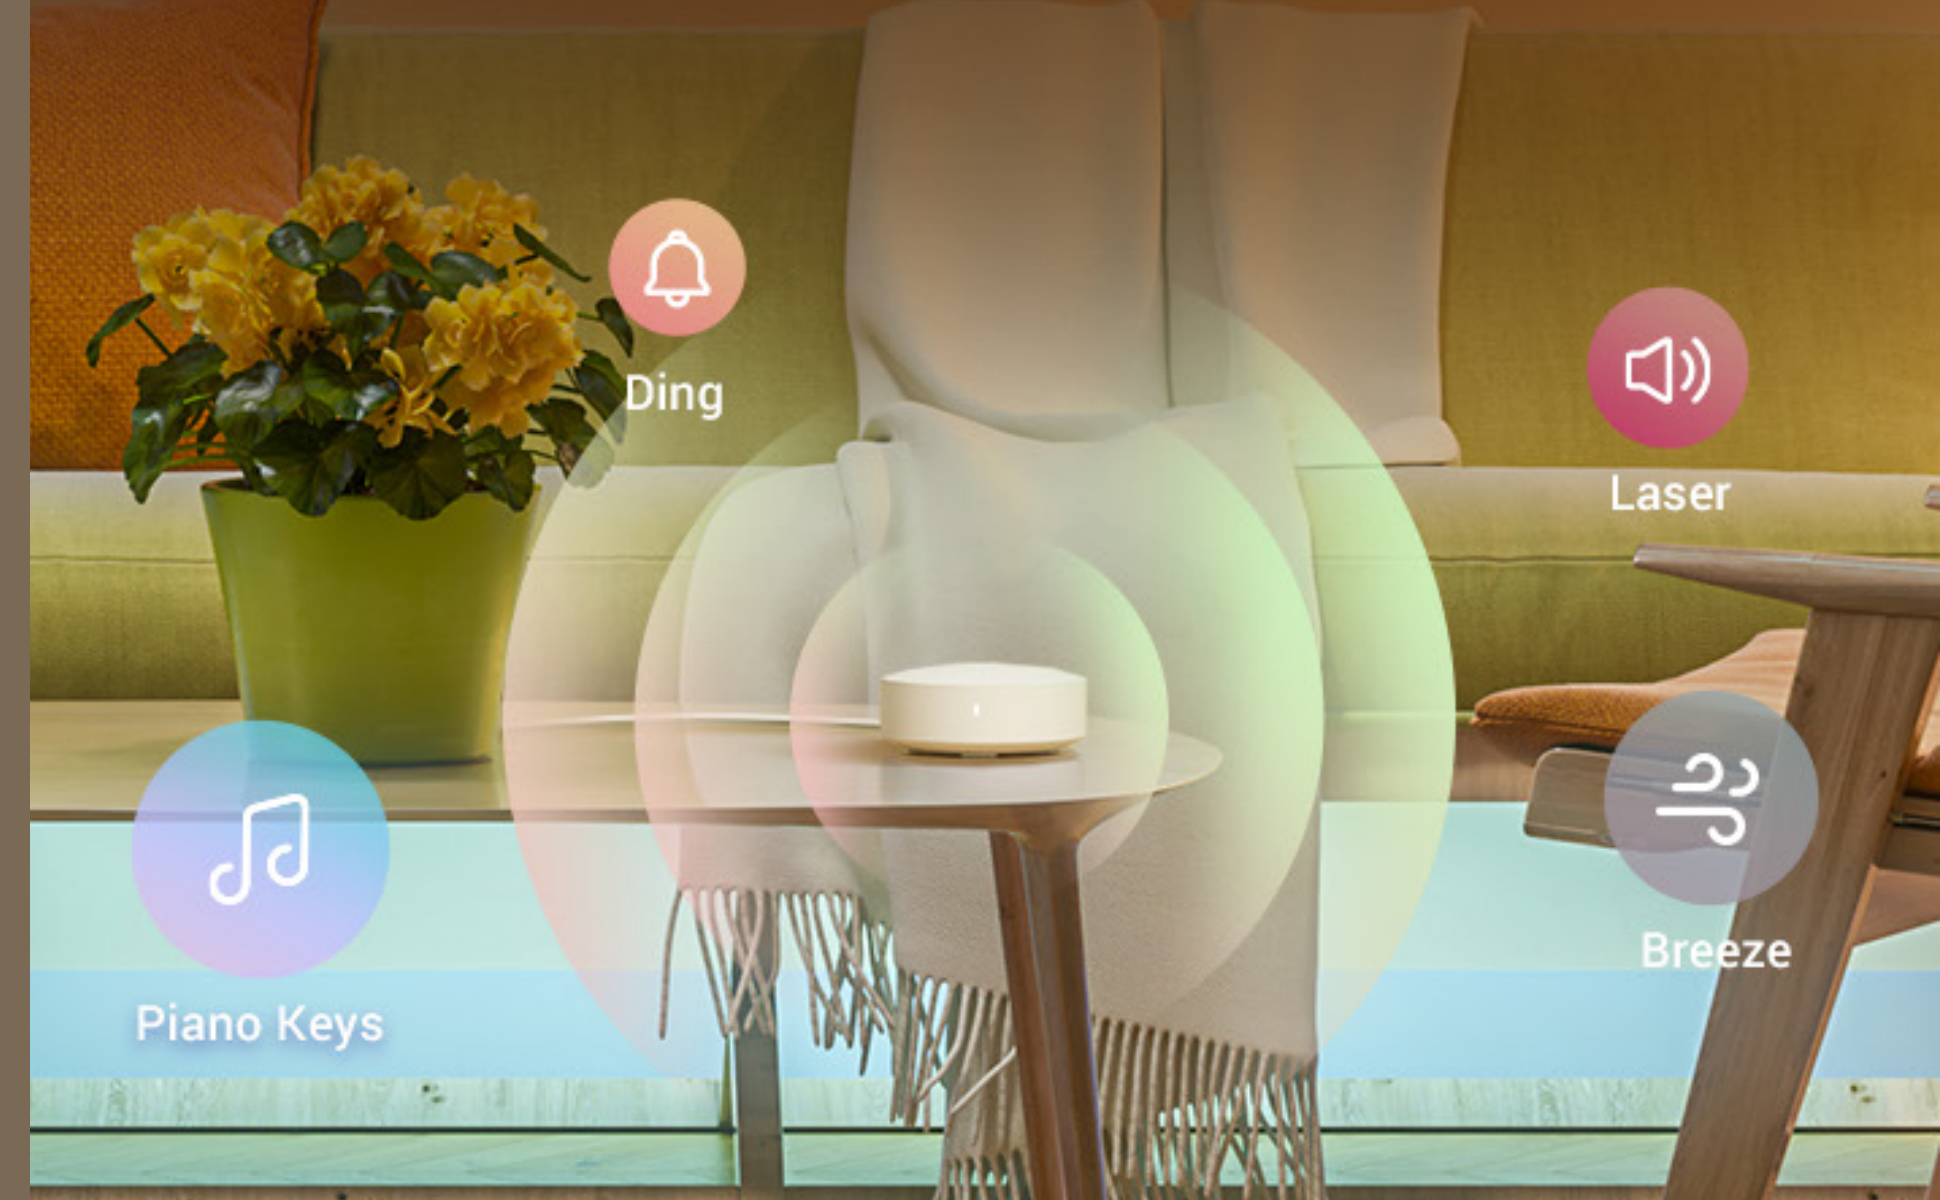EZVIZ Devices   Other Brands' Devices

Easy setup for your convenience

The A3-R200 finds its place on basically any spot with its sleek design and compact size. Whether you opt for a wired Internet connection or the convenience of Wi-Fi, the A3-R200 guarantees a stable performance.

Upgraded sound alerts

This gateway creates a truly tailored smart experience with a diverse selection of 20 distinct sound options. The voice volume is also enhanced to 85dB, so that you hear notifications loud and clear.

Ding

Laser

Breeze

Piano Keys

1 When successfully connected to the A3-R200, the T1C, T2C and T3C support integration with Apple HomeKit, while the T1C, T2C and T51C supports the Matter standard. More EZVIZ devices will be added to the list in the future. The compatibility with products of other brands is subject to actual conditions.

2 The A3-R200 can connect up to 32 battery-powered EZVIZ devices, or up to 64 devices if wired EZVIZ devices are added. More compatible products will be launched in the near future. Please verify product compatibility before purchasing.

3 The A3-R200 currently supports following cameras to auto-track activities upon sensor detection: H6c, C6N, CP1, TY1, TY2, H3, C8W. The list may grow as EZVIZ launches more products in the future.

Specifications CS-A3-R200-WBG

General

Interface	Type-C
Power Supply	Uses Type-C USB Cord,DC 5V / 1A
Power Consumption	Max.3W
Maximum Incoming Devices Quantity	Up to 64 ZigBee devices (including at least 3 electronic devices)
Wired Network	1*RJ45 (10M/100M Adaptive）
Speaker	0.8W 8Ω
Button	Main Button,Reset Button (Pinhole)
Operation Conditions	10 °C to 55 °C (14 °F to 131 °F), humidity 95% or less (non-condensing)
Dimensions	φ 80.0 × 33.0 mm (φ 3.15 × 1.30 inch)
Package Size	102.0 x 107.0 x 91.0 mm (4.0 × 4.2 x 3.6 inch)
Net Weight	90 g (3.2 oz)

Network

Ecosystem	HomeKit/Matter
Communication Methods	RJ45 interface network cable Wi-Fi 2.4 GHz ZigBee 3.0 Bluetooth 5.3
Communication Distance	Wi-Fi (2.4 GHz) < 200 m ZigBee 3.0 < 200 m (Tested in open environment)
Antenna	Built-in
Wi-Fi Standard & Frequency Range	IEEE 802.11b/g/n/ax
Security	WPA-PSK/WPA2-PSK
Channel Bandwidth	20 MHZ
Wi-Fi Pairing	AP Pairing
Protocol & Interface Protocol	EZVIZ Cloud Proprietary Protocol

In the box

- A3-R200 Home Gateway

- Power Adapter

- USB Cable

- Regulatory Information

- Quick Start Guide

Certifications

CE / RoHS / REACH / WEEE

Specifications are subject to change without notice. " ", "EZVIZ" and other trademarks and logos
are the properties of EZVIZ in various jurisdictions.